


Überblick

CHEP's foldable container solutions are used by the automotive industries in Europe, the Americas, and Asia Pacific for both domestic and cross border supply chains.

The Foldable Large Container (FLC) builds on the proven performance of existing bulk containers. It is specifically designed to reduce the cost of relocating empty containers while providing maximum product protection and load stability.

The range of containers includes different heights to meet regional requirements and is accepted by the majority of automotive manufacturers and suppliers.

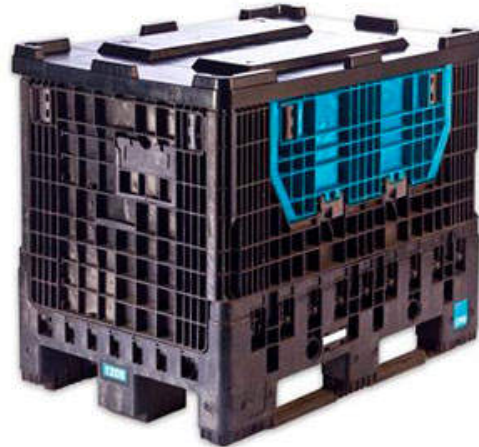

Funktionen und Vorteile

Ensure superior product protection with robust design features including ergonomic latches & handles, wear & damage resistant material and modular construction

Increases transport and storage space efficiency – containers are stackable when full or folded

Ability to access bulk parts line side through the use of the side access doors

Streamline line side processes with single person operation and the elimination of strapping and wrapping material

Improve handling flexibility and product security with four-way forklift access

Reduce time and effort for opening/closing access doors and collapsing containers with large, spring-loaded ergonomic latches

Eliminate packaging waste and the associated time and cost with fully recyclable materials

Reduces costs along the entire supply chain using a single container from Tier Supplier to line side

Spezifikationen

Maße – in Millimetern

	Länge	Breite	Höhe
Außen	1200	800	950
Innen	1120	720	765
Gefaltet	1200	800	406

Nominale Kapazität und nominales Gewicht

Maximale Kapazität	620 ltrs 0,62 m3
Maximales Ladegewicht	500 kg
Tare Weight	54 kg

Tragfähigkeit und Stapelung

Gestapelte Schichten im Transit und geöffneten Zustand	3
Gestapelte Schichten im Transit und zusammengeklappten Zustand	7
Gestapelte Schichten für die Lagerung im geöffneten Zustand	5
Gestapelte Schichten für die Lagerung zusammengeklappt	15

Sequence is indicated on the inner surface of sidewalls

Temperaturbeständigkeit

Minimum / Maximum	-20 °C / 40 °C
-------------------	----------------

Kommentare

Materialien

Base: HDPE - blue or black
 Access doors: HDPE - blue or grey
 Sidewalls: HDPE, blue or grey
 Access Door Hinges: HDPE, black
 Access Door Clips: Acetal, black or blue
 Sidewalls Clips: Acetal, black or blue
 Label Holders: Acetal, black

Handling

FLCs should be lifted by fork lift truck through the pallet base windows. The forks should reach completely into the pallet base and enter the FLC squarely

FLCs should not be pulled or pushed along the ground
 The dust cover should be kept with the FLC at all times

Empfohlene Verwendung / Applikationen

Catalysts, Harnesses, Mudguards, Pedals, Radiator grilles