


Plastic Pallet

1200 x 800 mm

Overview

The 1200 x 800 mm plastic display pallet has 4-way entry for ease in handling and is ideal for high-speed automation systems, with its consistent specification. Its anti-slip surface avoids slipping even when wet and the absence of lips allow for full use of the pallet's surface.

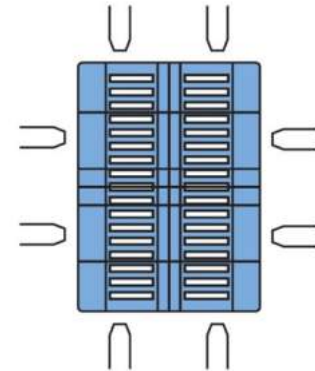

Features and Benefits

Protect goods from damage and contamination - all pallets are constructed from Contamination-free Materials (DIN 10503 and EHEDG), are hygienic and will not absorb moisture so are a suitable platform for packed food

Enhance productivity during storage and transport with consistent 4-way entry design ensuring compatibility with all standard equipment

Reduce occupational health and safety risks to the workforce through ability to safely rack (on 1200mm side) and carry heavy loads

Maximise top deck space with no protruding lips allowing full use of the pallet

Increase logistics efficiencies with compatibility for crates and trays – providing a total plastic system

Specifications

Dimensions - in millimeters

	Length	Width	Height
External	1200	800	160

Window / Pallet entry - in millimetres

	Width	Height
1200 mm side	315.0	100.0
800 mm side	225.0	100.0

Nominal Capacity and Weight

Tare Weight	22 kgs
-------------	--------

Configuration and Stacking

CHEP recommends a maximum rating of 1000 kgs as a safe working load and not to exceed 4000 kgs when stacking loaded pallets on a solid, flat surface (e.g. four pallets high with 1000 kgs each)

Pallets can be racked under the outside blocks with 1000 kgs load up to 40°C for 1 month without deflection exceeding 21 mm

Temperature Range

Minimum / Maximum	-35 °C / 40 °C
-------------------	----------------

Notes

Materials

Virgin High Density Polyethylene (HDPE), with metal reinforcements. The pallet is highly resistant to migration.

Handling

Maximise the use of the pallet surface

Minimise lifting from the undersides of the skids

Rack the pallets under the outside blocks

The pallet should not be directly racked from under the apertures of the pallet base, as shown in the figure opposite

Can be used on all materials handling equipment, designed for 800 x 1200 mm wooden pallet.

The pallet should not come into direct contact with the following substances: Benzene based compounds, Chlorine based compounds, Oleum, Nitric Acid, Bromic Acid, Methyl Bromide. (Please consult CHEP for specific advice).

It is the responsibility of all users and hirers to ensure that any other users to whom they pass on the pallet are advised of the contents of this specification sheet.

Performance and Standards

This pallet has been tested based on relevant parts of ISO 8611-1991, JISz 0606 and ASTM. D1185-94 Compliance