


## Etusivu

CHEP's foldable container solutions are used by the automotive industries in Europe, the Americas, and Asia Pacific for both domestic and cross border supply chains.

The Foldable Large Container (FLC) builds on the proven performance of existing bulk containers. It is specifically designed to reduce the cost of relocating empty containers while providing maximum product protection and load stability.

The range of containers includes different heights to meet regional requirements and is accepted by the majority of automotive manufacturers and suppliers.

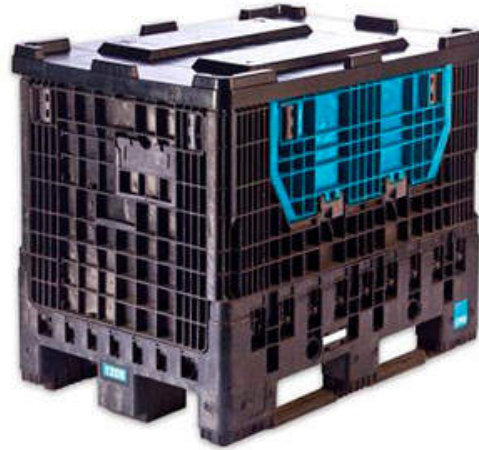

## Ominaisuudet ja edut

Ensure superior product protection with robust design features including ergonomic latches & handles, wear & damage resistant material and modular construction

Increases transport and storage space efficiency – containers are stackable when full or folded

Ability to access bulk parts line side through the use of the side access doors

Streamline line side processes with single person operation and the elimination of strapping and wrapping material

Improve handling flexibility and product security with four-way forklift access

Reduce time and effort for opening/closing access doors and collapsing containers with large, spring-loaded ergonomic latches

Eliminate packaging waste and the associated time and cost with fully recyclable materials

Reduces costs along the entire supply chain using a single container from Tier Supplier to line side

## Tekniset tiedot

### Mitat – millimetreinä

	Pituus	Leveys	Korkeus
Ulkoiset	1200	800	950
Sisäiset	1120	720	765
Kokoon taitettu	1200	800	406

### Nimelliskapasiteetti ja -paino

Enimmäiskapasiteetti	620 ltrs 0.62 m3
Kuorman enimmäispaino	500 kg
Taarapaino	54 kg

### Ominaisuudet ja pinoaminen

Pinotut kerrokset kuljetuksessa avattuna	3
Pinotut kerrokset kuljetuksessa kokoon taitettuna	7
Pinotut kerrokset varastointiin avattuna	5
Pinotut kerrokset varastointiin kokoon taitettuna	15

Sequence is indicated on the inner surface of sidewalls

### Lämpötila-alue

Vähintään/enintään	-20 °C / 40 °C
--------------------	----------------

## Huomautuksia

### Materiaalit

Base: HDPE - blue or black  
Access doors: HDPE - blue or grey  
Sidewalls: HDPE - blue or grey  
Access Door Hinges: HDPE, black  
Access Door Clips: Acetal, black or blue  
Sidewalls Clips: Acetal, black or blue  
Label Holders: Acetal, black

### Käsittely

FLCs should be lifted by fork lift truck through the pallet base windows. The forks should reach completely into the pallet base and enter the FLC squarely

FLCs should not be pulled or pushed along the ground  
The dust cover should be kept with the FLC at all times

### Käyttösuositukset

Catalysts, Harnesses, Mudguards, Pedals, Radiator grilles