


**Vue d'ensemble**

CHEP's foldable container solutions are used by the automotive industries in Europe, the Americas, and Asia Pacific for both domestic and cross border supply chains.

The Foldable Large Container (FLC) builds on the proven performance of existing bulk containers. It is specifically designed to reduce the cost of relocating empty containers while providing maximum product protection and load stability.

The range of containers includes different heights to meet regional requirements and is accepted by the majority of automotive manufacturers and suppliers.

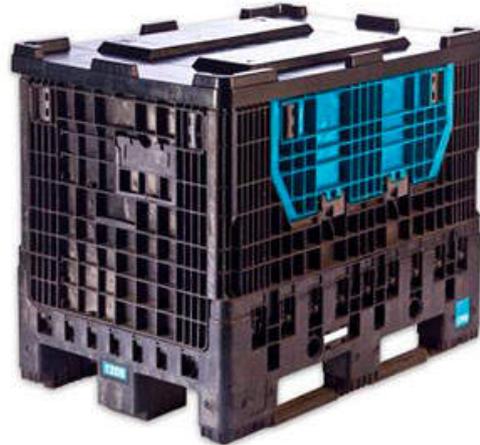

**Fonctionnalités et avantages**

Ensure superior product protection with robust design features including ergonomic latches & handles, wear & damage resistant material and modular construction

Increases transport and storage space efficiency – containers are stackable when full or folded

Ability to access bulk parts line side through the use of the side access doors

Streamline line side processes with single person operation and the elimination of strapping and wrapping material

Improve handling flexibility and product security with four-way forklift access

Reduce time and effort for opening/closing access doors and collapsing containers with large, spring-loaded ergonomic latches

Eliminate packaging waste and the associated time and cost with fully recyclable materials

Reduces costs along the entire supply chain using a single container from Tier Supplier to line side

**Spécifications**

**Dimensions - en millimètres**

	Longueur	Largeur	Hauteur
Externe	1200	800	950
Interne	1120	720	765
Plié	1200	800	406

**Capacité nominale et poids**

Capacité maximale	620 ltrs 0.62 m3
Poids de la charge maximale	500 kgs
Poids à vide	54 kg

**Configuration et empilement**

Couches empilées en transit de matériels pliés	3
Couches empilées en transit de matériels ouverts	7
Couches empilées de matériels ouverts pour le stockage	5
Couches empilées de matériels pliés pour le stockage	15

Sequence is indicated on the inner surface of sidewalls

**Plage de température**

Minimum / Maximum	-20 °C / 40 °C
-------------------	----------------

**Remarques**

**Matériaux/matériel**

Base: HDPE - blue or black  
Access doors: HDPE - blue or grey  
Sidewalls: HDPE - blue or grey Access  
Door Hinges: HDPE, black  
Access Door Clips: Acetal, black or blue  
Sidewalls Clips: Acetal, black or blue  
Label Holders: Acetal, black

**Manutention**

FLCs should be lifted by fork lift truck through the pallet base windows. The forks should reach completely into the pallet base and enter the FLC squarely

FLCs should not be pulled or pushed along the ground  
The dust cover should be kept with the FLC at all times

**Applications recommandées / utilisation**

Catalysts, Harnesses, Mudguards, Pedals, Radiator grilles