


Síntese

CHEP's foldable container solutions are used by the automotive industries in Europe, the Americas, and Asia Pacific for both domestic and cross border supply chains.

The Foldable Large Container (FLC) builds on the proven performance of existing bulk containers. It is specifically designed to reduce the cost of relocating empty containers while providing maximum product protection and load stability.

The range of containers includes different heights to meet regional requirements and is accepted by the majority of automotive manufacturers and suppliers.

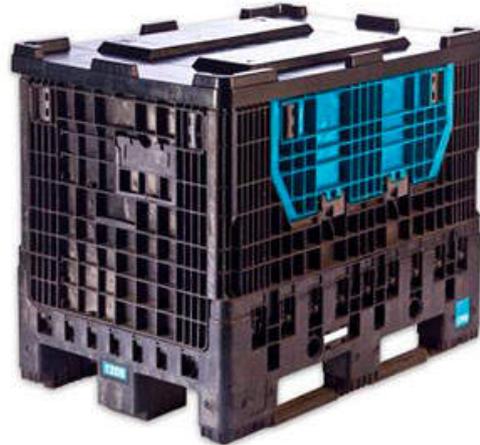

Características e benefícios

Ensure superior product protection with robust design features including ergonomic latches & handles, wear & damage resistant material and modular construction

Increases transport and storage space efficiency – containers are stackable when full or folded

Ability to access bulk parts line side through the use of the side access doors

Streamline line side processes with single person operation and the elimination of strapping and wrapping material

Improve handling flexibility and product security with four-way forklift access

Reduce time and effort for opening/closing access doors and collapsing containers with large, spring-loaded ergonomic latches

Eliminate packaging waste and the associated time and cost with fully recyclable materials

Reduces costs along the entire supply chain using a single container from Tier Supplier to line side

Especificações

Dimensões - em milímetros

	Comprimento	Largura	Altura
Exterior	1200	800	950
Interior	1120	720	765
Dobrado	1200	800	406

Capacidade nominal e peso

Capacidade máxima	620 ltrs	0.62 m3
Peso de carga máxima	500 kg	
Peso da embalagem	54 kg	

Configuração e empilhamento

Camadas empilhadas em transporte (abertas)	3
Camadas empilhadas em transporte (dobradas)	7
Camadas empilhadas para armazenamento (abertas)	5
Camadas empilhadas para armazenamento (dobradas)	15

Sequence is indicated on the inner surface of sidewalls

Amplitude de Temperatura

Mínimo / Máximo	-20 °C / 40 °C
-----------------	----------------

Notas

Materials

Base: HDPE - blue or black
Access doors: HDPE - blue or grey
Sidewalls: HDPE - blue or grey
Access Door Hinges: HDPE, black
Access Door Clips: Acetal, black or blue
Sidewalls Clips: Acetal, black or blue
Label Holders: Acetal, black

Manipulação

FLCs should be lifted by fork lift truck through the pallet base windows. The forks should reach completely into the pallet base and enter the FLC squarely

FLCs should not be pulled or pushed along the ground
The dust cover should be kept with the FLC at all times

Utilização / Aplicações recomendadas

Catalysts, Harnesses, Mudguards, Pedals, Radiator grilles