


Wooden & Metal Pallet

800 x 600 mm

Overview

The 800 x 600 mm metal and timber CHEP pallet is a heavy duty pallet that can be safely used for most applications in the distribution and transport chain in Europe. The pallet's dimensions make it ideal for in-store pallet display, improving product presentation.

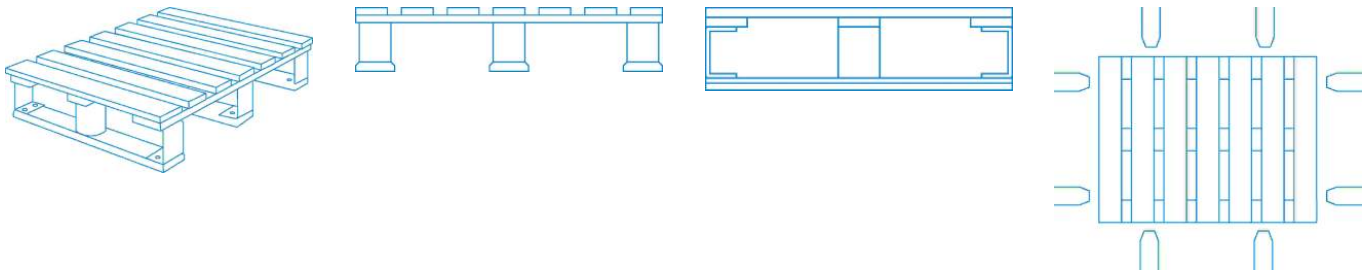

Features and Benefits

- Reduce product damage due to hard-wearing steel block design providing durability during handling and transit
- Saves costs, reduces picking time and facilitates cross docking of fast moving products making it ideal for use within Distribution Centres
- Reduce staff costs through quicker and easier product replenishment, saving time and minimising risk of product loss
- Increase operational productivity through consistent specification – pallet is suitable for automated production and warehousing facilities
- Enhance efficiencies during storage and transport with consistent 4-way entry design ensuring compatibility with all standard equipment

Specifications

| Dimensions - in millimeters | | | |
|-----------------------------|--------|-------|--------|
| External | Length | Width | Height |
| | 800 | 600 | 163 |

| Window / Pallet entry - in millimetres | | |
|--|-------|--------|
| | Width | Height |
| 800 mm side | 250.0 | 120.0 |
| 600 mm side | 250.0 | 90.0 |

| Configuration and Stacking | |
|----------------------------|--|
|----------------------------|--|

CHEP recommends a maximum rating of 500 kgs as a safe working load and not to exceed 2000 kgs when stacking loaded pallets on a solid surface. Empty pallets can be stored 26 high.

Notes

- Materials**
 - Wood:** quality timber from a controlled selection of different wood types
 - Corner brackets:** galvanised steel and plastic coated central posts
 - Paint:** water based, complying with the relevant European legislation
 - Nails:** standard wire All materials comply with the European legislation on heavy metal content
- Handling**
 - Maximise the use of the pallet surface
 - Minimise lifting from the undersides of the skids
 - Pallet can be racked safely with a maximum uniform distributed load of 500 kgs
- Performance and Standards**
 - A heavy duty pallet that can be safely used for most applications in the distribution and transport chain in Europe